SØ vario quick start guide



⏻ POWER button

↑ UP button

↓ DOWN button

basics for operation

This document uses ✱ for a button click and ◎N for press and hold for N seconds.

examples

- ⏻ ◎3 press and hold the POWER button for 3s
- ↑ ✱ click the UP button

POWER ON – ⏻ ◎3; ⏻ ✱

press and hold the POWER button for 3 seconds, then release and click the POWER button again

actions on home screen

⏻ **OFF** – ⏻ ◎2; ⏻ ∗	**POWER OFF** – not possible in flight mode
↻ – ↓/↑ ∗	switch to next/previous home screen
☰ – ⏻ ◎2; ↑ ∗	enter the settings menu
☰ – ⏻ ◎2; ↓ ∗	enter the layout menu
↻ – ⏻ ∗	cycle through adjustable or switchable widgets
⇄ – ⏻ ◎2	toggle widget content if selected
↑/↓ – ↑/↓ ∗	adjust widget value if selected
↑/↓ – ↑/↓ ∗	adjust sound volume up/down if speaker is selected
×/) – ⏻ ◎2	mute/unmute sound if speaker is selected

actions in menu

☰ ↑/↓ – ↑/↓ ∗ move up/down in the menu

☰ – ⏻ ∗ enter the sub-menu

☑/☐ – ⏻ ∗ enable/disable menu entry

↩ – ⏻ ◎2 exit to a higher level

↩ ↩ ↩… – ⏻ ◎… hold ⏻ to exit the menu

special button actions don't use if not needed

RESET – ⏻↑ ◎5 press and hold ⏻ and ↑ for ~5s


DFU – ⏻↑↓ ◎5 enter programming mode – press and hold all 3 buttons for ~5s, then release the power button first

USB connection

Connect the USB cable and click **USB connection** in the settings menu. The vario will enter mass storage mode (MSC). USB connection is not possible in flight mode. To disconnect (eject), click **Eject** on the computer or hold ⏻.

SD card

is accessible from the bottom panel of the vario. Its holder is a push-push type, so push it with a nail or pen to release it. Insert the card into its slot, **metal contacts facing up**, and push it as before. You don't need to handle the SD card, rather use the MSC connection to transfer IGC files or update the configuration. You may copy AGL files of whole continents directly to the SD card. Besides the SD card slot, there is a **USB-C** port for charging and PC connection, and a **sound channel port**.

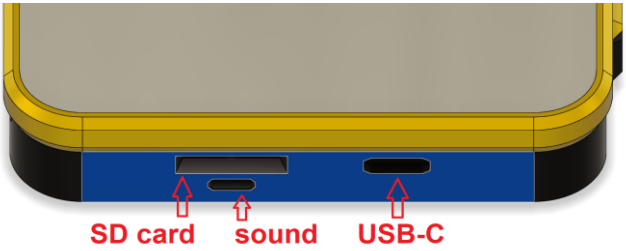

other information

You can find more detailed and up-to-date info on our product page here vps.skybean.eu/SO_vario

Click here for a detailed user guide:
vps.skybean.eu/S0_guide

email: info@skybean.eu

instagram.com/skybean_vario

youtube.com/c/SkyBeanVarios

skybean.eu

rev. 2611